



Build a FlounderPro 8550

Easy to Make FlounderPro 8550
Light and Wiring Kit Includes Pieces Shown Below



Scroll Down ↓




Build a FlounderPro 8550

Easy to Make FlounderPro 8550

Build your own FlounderPro 8550 and SAVE \$\$

Use Schedule 40 PVC

PVC Vertical Shaft & Handle

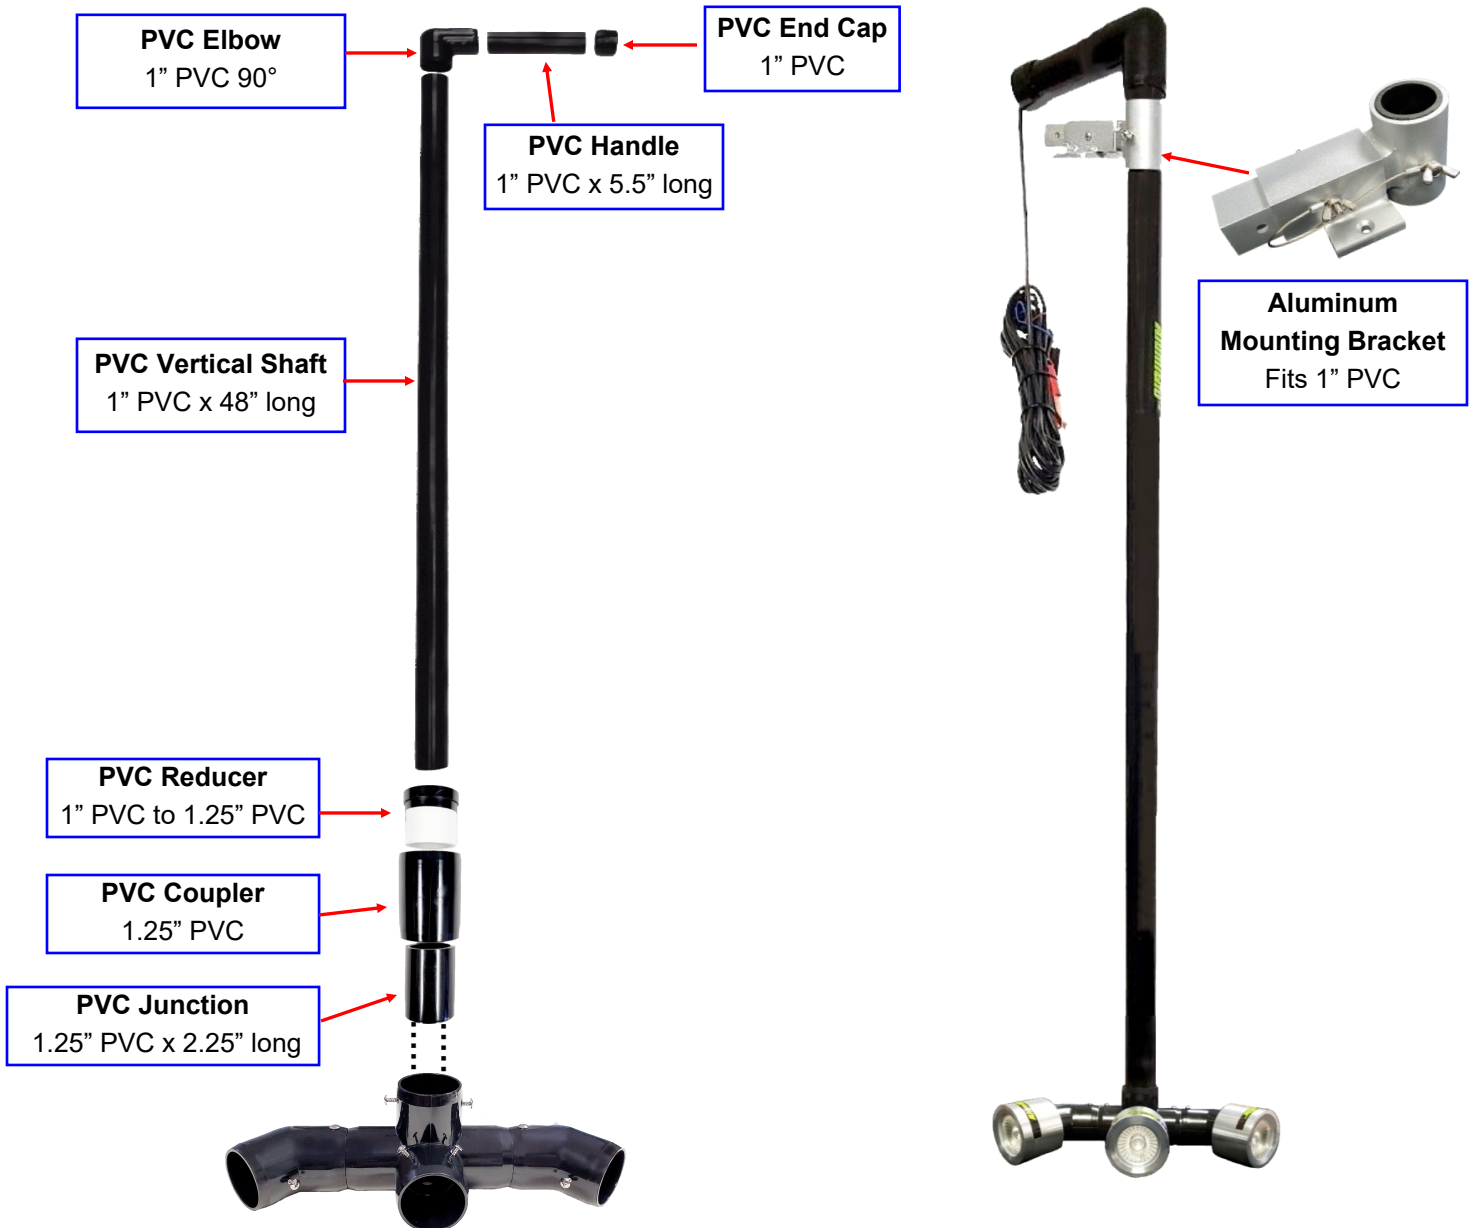

Scroll Down ↓




Build a FlounderPro 8550

Easy to Make FlounderPro 8550

Build your own FlounderPro 8550 and SAVE \$\$

Use Schedule 40 PVC

PVC Light Head Assembly

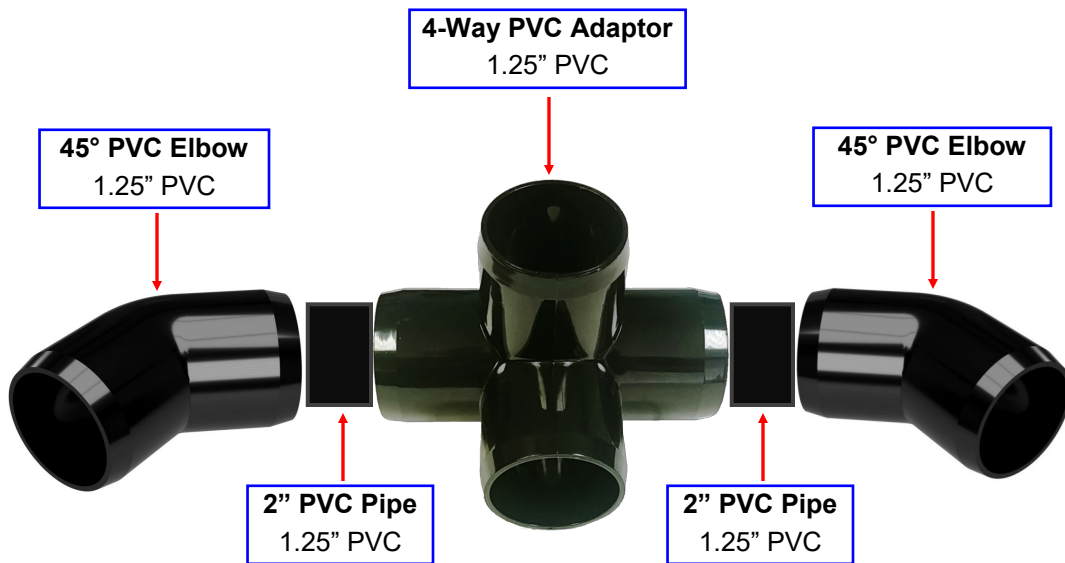


PVC Light Head Assembly can either be glued together using PVC glue or it can be assembled using #6 x 3/8" stainless steel screws which allows the 45° Elbows to be adjusted or changed if need be.





Build a FlounderPro 8550

Lights and Wiring Harness

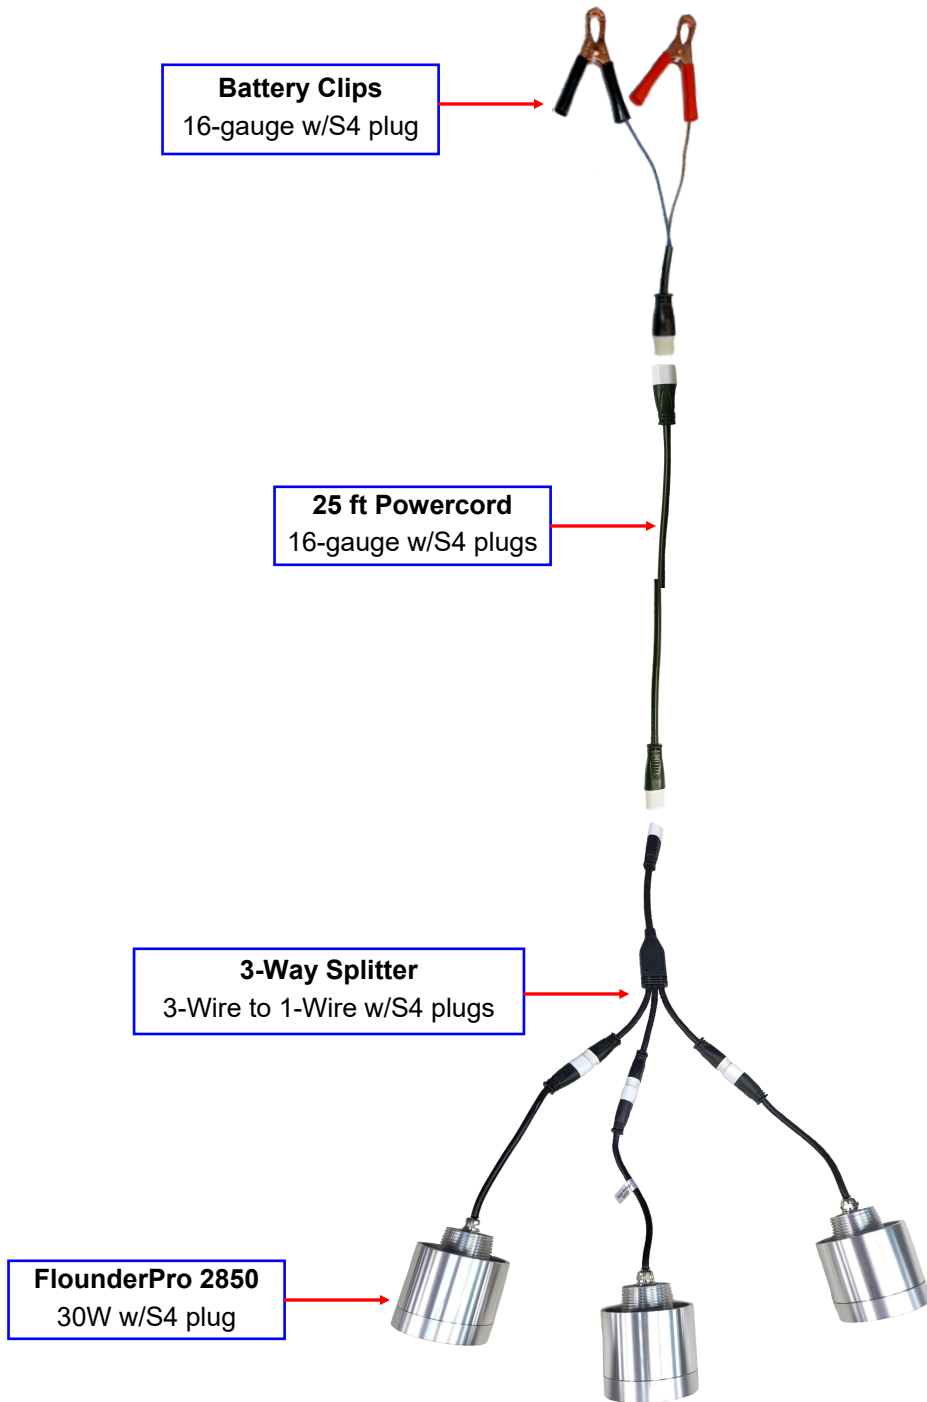



Build a FlounderPro 8550

Assembly Instructions

- Slide Aluminum Mounting Bracket (7) onto Vertical 1" PVC Shaft (2)
- Run "Female" end of power-cord through 1" PVC Handle Assembly and Vertical Shaft
- Position the Light Head Assembly (1) below the Vertical PVC Shaft (2)
- Plug the Light Head Connections (3) into the Power-Cord Connection (4)
- Slide the Light Head Assembly (1) onto the Schedule 40 1" Vertical Shaft (2) (Use PVC glue or screws to secure pieces).
- To Remove or Replace FlounderPro 2850 Light Heads, loosen screws (5) on PVC light head assembly.

